

PRODUCT SPECIFICATIONS

DH-NVR5808 5816 5832

8/16/32 Channel 2U Network Video Recorder



Features

- > Up to 8/16/32 channel with 1080p real-time live view
- > H.264/MJPEG dual codec decoding
- > Up to 5Mp resolution
- > Max 240fps@1080p, 480fps@720p, 960ps@D1 preview & recording
- > HDMI / VGA simultaneous video output
- > 16 channel synchronous real-time playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech and etc.
- > ONVIF Version 2.0 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 8 SATA HDDs up to 32TB, 1 eSATA up to 16TB, 4 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

Technical Specifications

Model	DH-NVR5808	DH-NVR5816	DH-NVR5832
System			
Main Processor	Dual-core embedded processor		
Operating System	Embedded LINUX		
Video & Audio			
IP Camera Input	8 channel	16 channel	32 channel
Two-way Talk	1 channel Input, 1 channel Output, BNC		
Display			


PRODUCT SPECIFICATIONS

Interface	1 HDMI, 1 VGA, 1TV		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split	1/4/8/9	1/4/8/9/16	1/4/8/9/16/25/32
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording			
Compression	H.264 / MJPEG		
Resolution	5MP(2560×1920) / 3MP(2048×1536) / 1080P(1920×1080) / 720P(1280×720) / D1 (704×576/704×480)		
Record Rate	Max 240fps@1080p, 480fps@720p, 960ps@D1		
Bit Rate	48~ 8192kbps		
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop		
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm			
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input	8 channel	16 channel	16 channel
Relay Output	6 channel		
Playback & Backup			
Sync Playback	1/4/8	1/4/8/16	1/4/8/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search		
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device / eSATA Device / Internal SATA burner/ Network		
Network			
Ethernet	2 RJ-45 port (10/100M/1000M)		
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)		
Max. User Access	20 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
Storage			
Internal HDD	8 SATA ports (8HDDs or 6HDDs+1CD/DVD-RW), up to 32TB		

PRODUCT SPECIFICATIONS

External HDD	1 eSATA port (Max 4 SATA HDDs), up to 16TB
Auxiliary Interface	
USB	4 ports (2 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	AC 100~240V, 50/60 Hz
Power Consumption	40W
Working Environment	-10 ~+55°C / 10~90%RH / 86~106kpa
Dimension (W×D×H)	2U, 440mm × 460mm × 89mm
Weight	6KG(without HDD)

System Connection

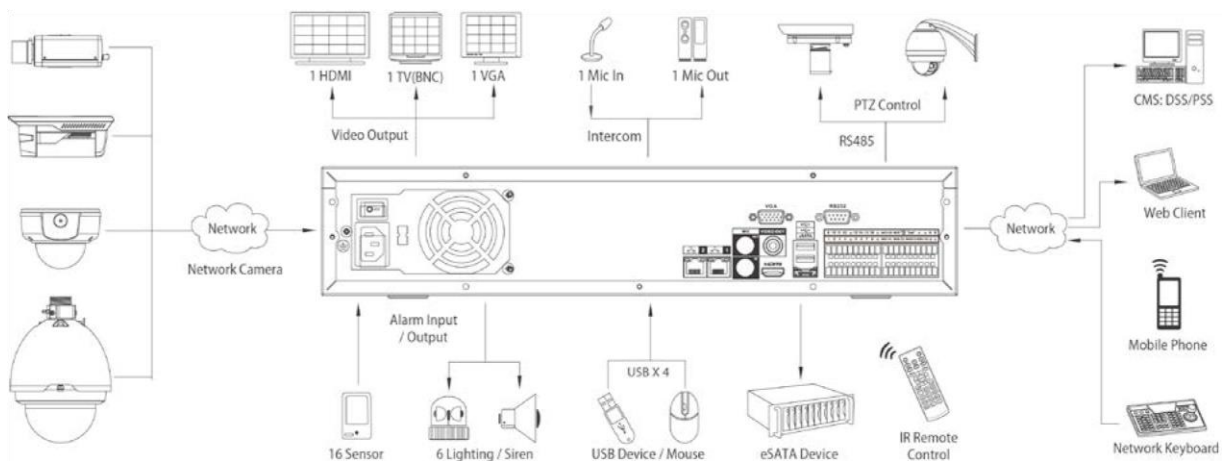

* Take NVR5832 as an example