

Product Specifications

HCVR5824/5832S

24/32CH 720P 2U HDCVI DVR



Features


- Up to 24/32 cameras with 1080p realtime preview
- H.264 dual-stream video compression
- HCVR5824/5832S: All channel 720P
- 2HDMI/VGA/TV simultaneous video output
- 16 channel synchronous realtime playback, GRID interface & smart search
- 3D intelligent positioning with Dahua PTZ dome camera
- Support 8 SATA HDDs up to 32TB, 1 eSATA up to 16TB, 4 USB2.0
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

Technical Specifications

Model		HCVR5824S	HCVR5832S
System			
Main Processor	Embedded processor		
Operating System	Embedded LINUX		
Video			
Input	24 channel, BNC	32 channel, BNC	
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
Audio			
Input	16 channel, BNC		
Output	1 channel, BNC		
Two-way Talk	1 channel Input,1 channel Output, BNC		
Display			
Interface	2 HDMI, 1 VGA, 1 TV		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 800×600		
Display Split	1/4/8/9/16/25	1/4/8/9/16/25/36	
Privacy Masking	4 rectangular zones (each camera)		
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording			
Video/Audio Compression	H.264/G.711		
Resolution	720P(1280×720)/960H(960×576/960×480)/D1/4CIF(704×576/704×480)/CIF(352×288/352×240)/QCIF(176×144/176×120)		
Record Rate	Main Stream:	720P/960H/D1/HD1/2CIF/CIF(1~25/30fps)	
	Extra Stream	CIF/QCIF(1~25/30fps)	
Bit Rate	48~8192Kb/s		
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop		
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm			
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Spot, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input	16 channel		
Relay Output	6 channel		
Playback & Backup			
Sync Playback	1/4/8/16		
Search Mode	Time/Date, MD & Exact search (accurate to second)		
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device/eSATA Device/Internal SATA burner/Network		

Network	
Ethernet	2RJ-45 port (10/100M/1000M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	8 SATA ports, up to 32TB
External HDD	1 eSATA port, up to 16TB
Auxiliary Interface	
USB Interface	4 ports (2 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port RS485 for PTZ control, 1 port RS422 for Keyboard
General	
Power Supply	AC 100~240 V, 50/60 Hz
Power Consumption	40W
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa
Dimension(W×D×H)	2U, 440mm×460mm×89mm
Weight	6.5KG(without HDD)

System Connection

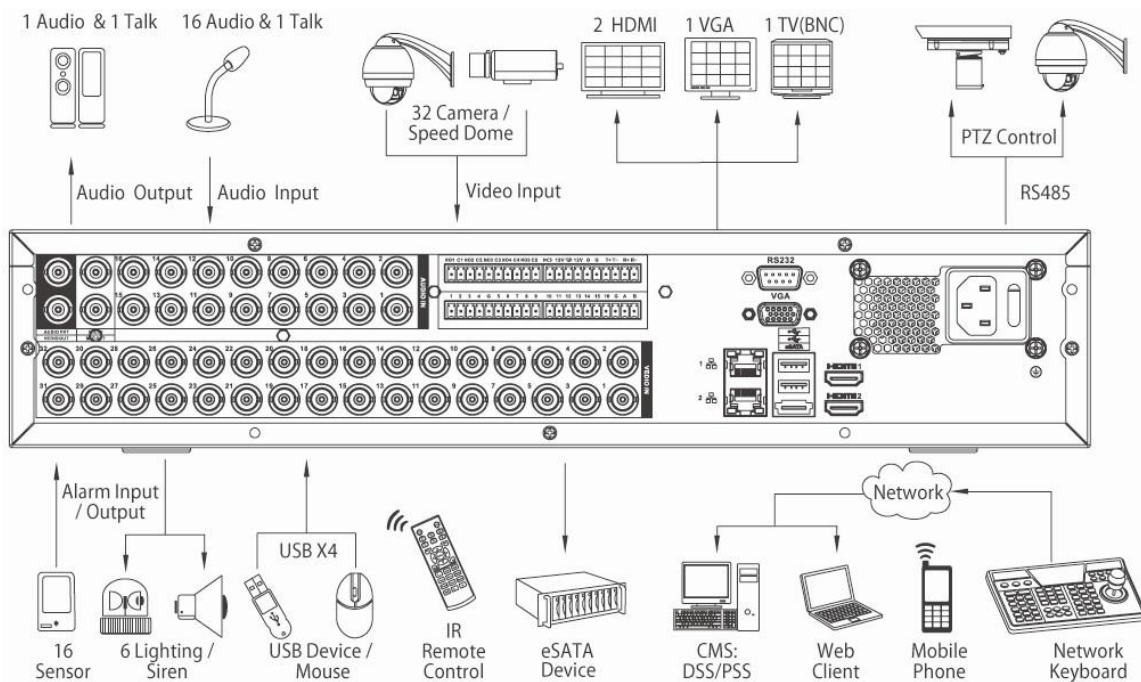

*Takes HCVR5832S as an example